


Reverse DC Fan Airflow



To reverse the DC Fan Airflow direction, change the DC wiring polarity and perform the steps shown below.

STEP 1

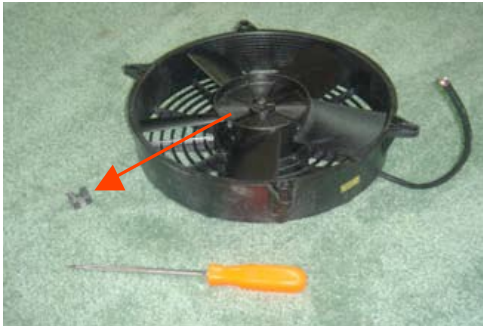

Carefully remove Fan Assy. Retaining Clip.

STEP 2



Pull Fan Blade Assy. up off of shaft, rotate 180° then place back onto shaft.

IMPORTANT NOTE:

FOR OPTIMUM FLOW AND PERFORMANCE, MAKE SURE THE BLADE ROTATION AND AIRFLOW MATCHES THE PHOTOGRAPH BELOW:

STEP 3



Ensure Fan Assy. is properly seated onto shaft alignment pin.

STEP 4



Snap Retaining Clip back into its original position.

